


# MINIMAL

MINIMAL 60  
 SQUARE NOSE  
 DIMINISHING TYPE (75X10MM)  
 CLEAR ANODISED / BLACK INSERT

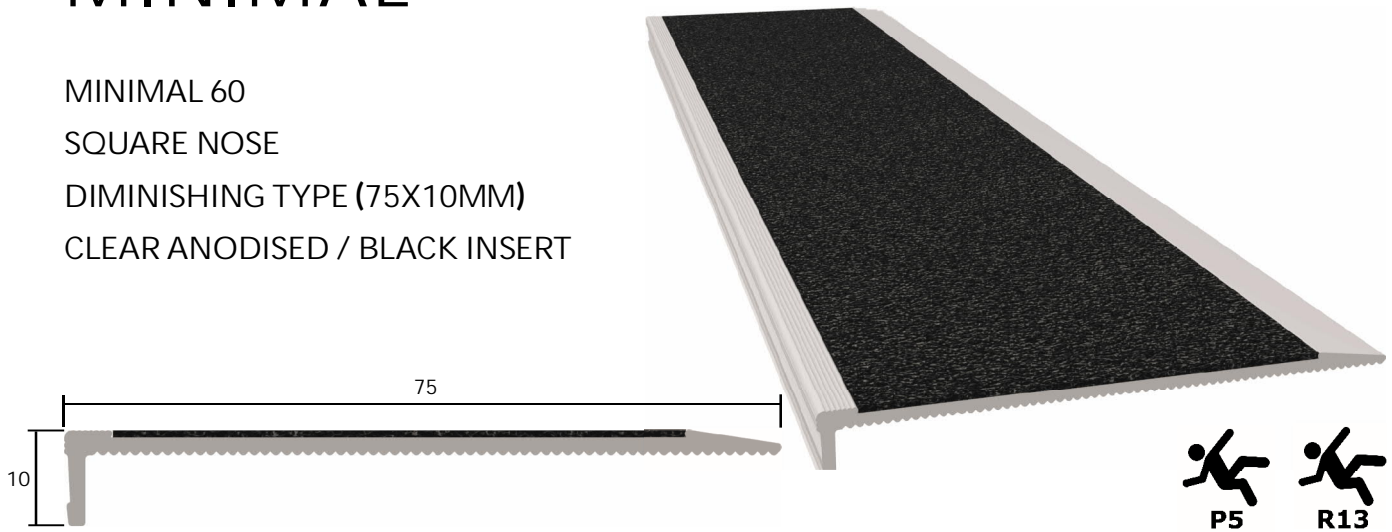

## SPECIFICATION

M60-SN-DT(75x10)CA/BLACK

MINIMAL 60

SQUARE NOSE

DIMINISHING TYPE

OVERALL DIMENSIONS 75x10 mm

CLEAR anodised aluminium

BLACK insert

## FEATURES


- AS 1428.1:2009 compliant design with a black colour providing a high degree of luminance contrast against light to mid surrounding substrates\*
- AS 4568:2013 P5 slip resistance classification - rated for internal and external environments
- Heavy duty profile design suitable for high traffic areas
- Standard finish is clear anodised - black anodised available by request
- Concealed fixings
- Supplied cut to length and with countersunk holes pre-drilled
- Suitable stainless steel fixings and adhesives available for substrates/floor coverings including concrete, tile, timber and carpet
- Manufactured in Australia by Safety Stride Pty. Ltd. under a strict internal quality program which guarantees dependable output quality

\* This product is compliant to AS 1428.1:2009 so long as an insert colour offering a minimum of 30% luminance contrast to the surrounding colour is specified.  
 Please contact Safety Stride Pty Ltd for assistance.



# MINIMAL

MINIMAL 60  
 SQUARE NOSE  
 DIMINISHING TYPE (75X10MM)  
 CLEAR ANODISED / SAFETY YELLOW INSERT

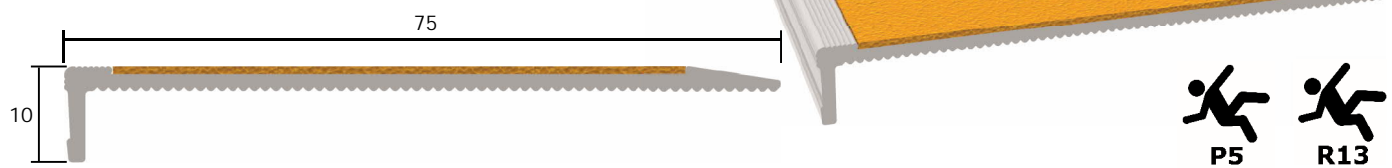

## SPECIFICATION

M60-SN-DT(75x10)CA/SAFETY YELLOW

MINIMAL 60

SQUARE NOSE

DIMINISHING TYPE

OVERALL DIMENSIONS 75x10 mm

CLEAR anodised aluminium

SAFETY YELLOW insert

## FEATURES

- AS 1428.1:2009 compliant design with a hi-vis yellow colour providing a high degree of luminance contrast against dark substrates\*
- AS 4568:2013 P5 slip resistance classification - rated for internal and external environments
- Minimal, low profile design for Retrofit applications with tapered reducer at rear
- Offers a dramatically increased service life over direct-stuck non-slip tape
- Standard finish is clear anodised - black anodised available by request
- Concealed fixings
- Supplied cut to length and with countersunk holes pre-drilled
- Suitable stainless steel fixings and adhesives available for substrates/floor coverings including concrete, tile, timber and carpet
- Manufactured in Australia by Safety Stride Pty. Ltd. under a strict internal quality program which guarantees dependable output quality

\* This product is compliant to AS 1428.1:2009 so long as an insert colour offering a minimum of 30% luminance contrast to the surrounding colour is specified.  
 Please contact Safety Stride Pty Ltd for assistance.

